
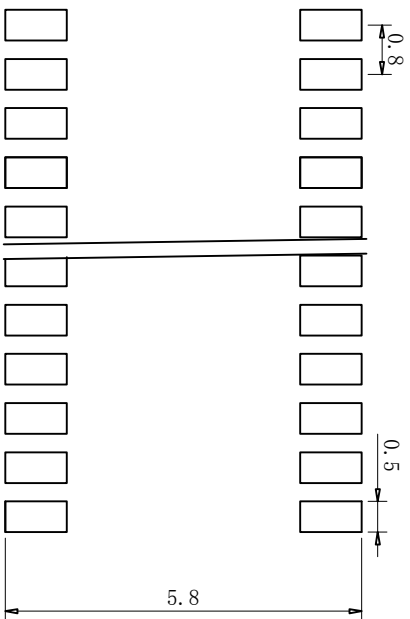
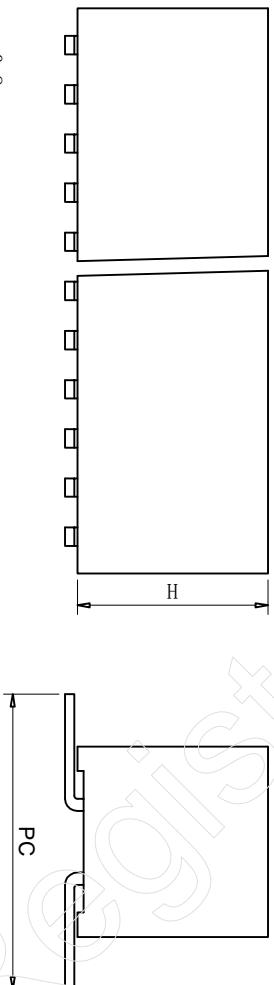


版本 REV	编号 ECN NO.	位置 LOCATIONS	变更内容 DESCRIPTION	日期 DATE	变更人 DESIGN
A0					

Specifications

1. Current Rating: 1amps
2. Insulator Resistance: 5000 Megohms min.
3. Dielectric withstanding Voltage: AC 500V
4. Operating Temperature: -40°C to +105°C
5. Contact Material: phosphor Bronze
6. Insulator Material: Asfollows
7. Plated: Asfollows

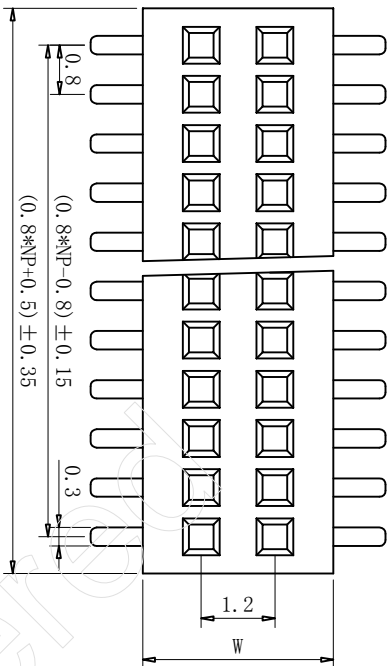

PCB LAYOUT

TOLERANCE UNLESS OTHERWISE SPECIFIED	ANGLES
LINER	ANGLE
±0.3	0°
±0.2	±1.0°
±0.1	±0.5°

品名 TITLE:	PH0.8*H SMD双排焊母	制图 (D):		日期 (Date):	
料号 (P/N):		审核 (CHKD):		日期 (Date):	
库号 (M/N):		核准 (APPD):		日期 (Date):	
比例 (SCALE):	1:1	张数 (SHEET):	XOFX	尺寸 (SIZE):	A4
	(UNITED) mm			规格 (TYPE):	

深圳市永连旺电子有限公司