
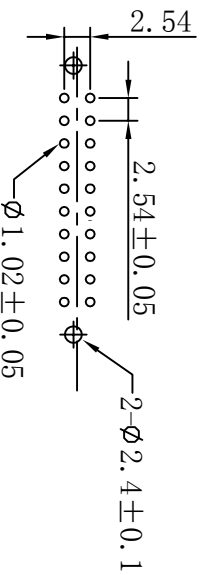
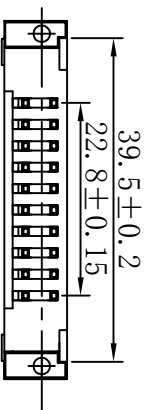
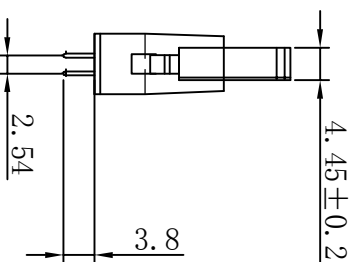
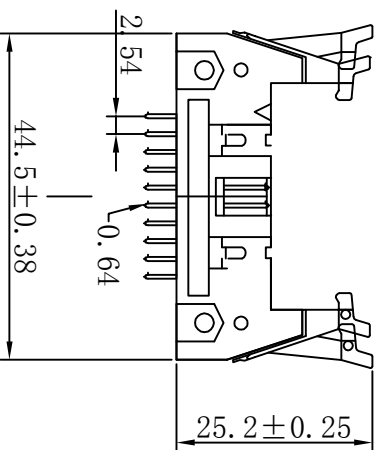
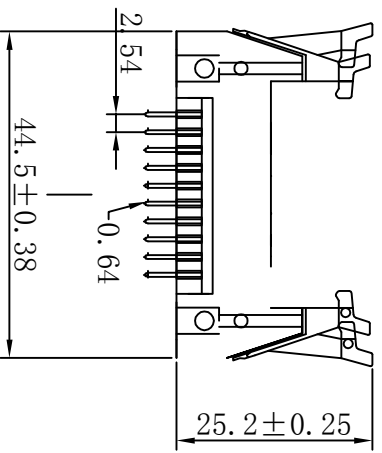


8.2±0.2



1. MATERIALS AND FINISH

1.1 HOUSING MATERIALS:

THERMOPLASTICS (UL94V-0)

1.2 CONTACTS:

COPPER ALLOY

1.3 PLATING:

PLATING GOLD OVERALL

UNDERPLATING NICKEL

2. SPECIFICATIONS

2.1 CURRENT RATING:

1AMP. MAX

2.2 INSULATION RESISTANCE:

5000MΩ MIN AT 500V DC

2.3 DIELECTRIC WITHSTANDING VOLTAGE:

500V(r. m. s) AC FOR 1 MINUTE.

2.4 OPERATING TEMPERATURE:

-40° C TO +85∅.

HEADER PH2.54mm DIP 180度

Customer:

Approval:

Unit

Scale

Date

Drawing No:

Check:


mm

17.04.22

P/NO:

Pin Longer:

Signatuer:



深圳市永连旺电子有限公司