

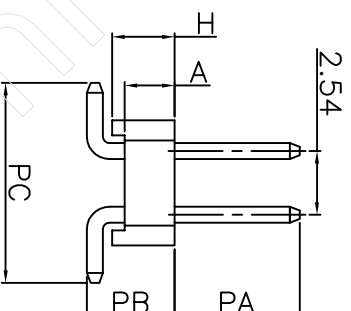


(2.54*NP)±0.30

(2.54*NP-2.54)±0.15

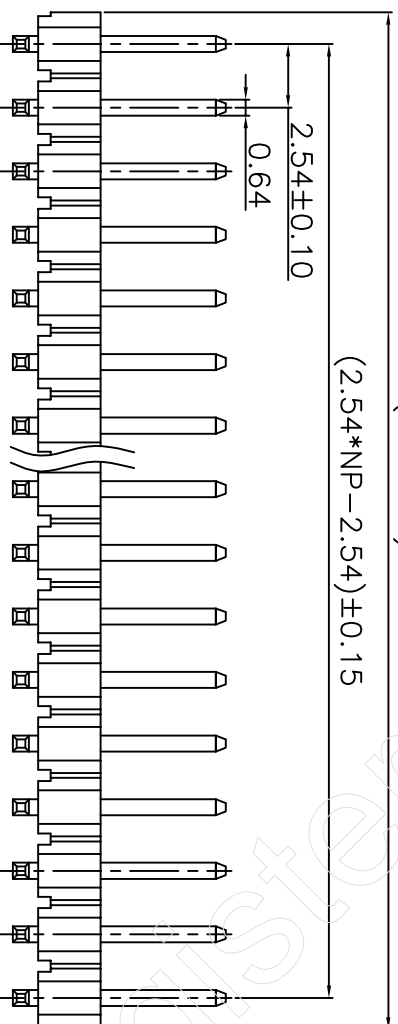

(2.54*NP-2.54)±0.10

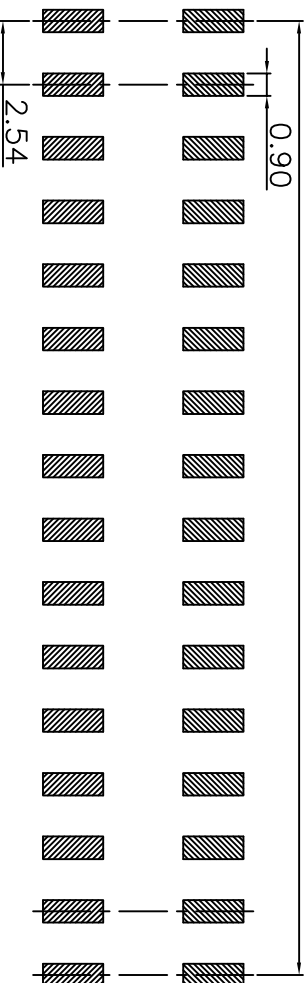

PCB LAYOUT

版本号	变更说明	日期	签名
A	NEW	12.07.09	Zeng_qc

Specifications

- 1. Current Rating: 2Amps
- 2. Insulation Resistance: 5000 MΩ min.
- 3. Dielectric withstanding Voltage: AC 500V
- 4. Contact Resistance: 30 mΩ max.
- 5. Operating Temperature: -40°C to +105°C
- 6. Contact Material: Copper Clad Steel
- 7. Insulation Material: As follows
- 8. Plated: As follows

公差标准	尺寸	角度	度
线性	±0.25	0.°	±3°
	±0.20	.0°	±2°
	±0.10	.00°	±1°

深圳市永连旺电子有限公司			
品名	排针PH2.54 双排 2NP SMT 系列	制图	
料号		审核	
文件编号		核准	
比例	1:1	单位	mm
		核	
		页码	2/4
		尺码	A4