
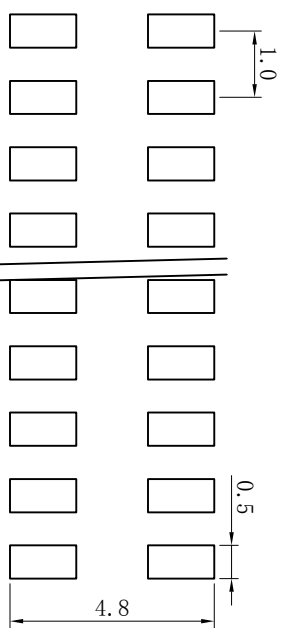

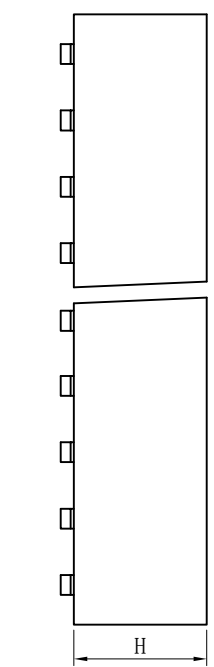


版本 REV	编号 ECON NO.	位置 LOCATIONS	变更内容 DESCR IPTION	日期 DATE	变更人 DESIGN
A0					

Specifications

1. Current Rating: 1Amps
2. Insulator Resistance: 5000 Megohms min.
3. Dielectric withstanding Voltage: AC 500V
4. Operating Temperature: -40°C to +105°C
5. Contact Material: phosphor Bronze
6. Insulator Material: Asfollows
7. Plated: Asfollows

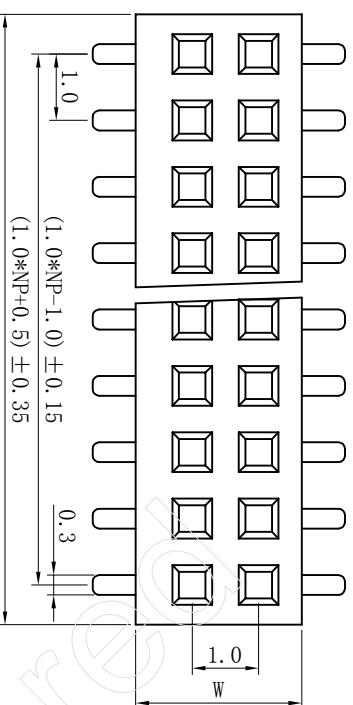

PCB LAYOUT

TOLERANCE UNLESS OTHERWISE SPECIFIED	
LINER	ANGLES
±0.3	±2.0°
±0.2	±1.0°
±0.1	±0.5°

品名 TITLE:		PHL.0PH SMT双排焊母		制图 (D):		日期 (Date):	
料号 (P/N):		审核 (CHKD):		日期 (Date):		日期 (Date):	
型号 (M/N):		核准 (APPD):		日期 (Date):		日期 (Date):	
比例 (SCALE):	1:1	单位 (UNITED):	mm	张数 (SHEET):	XOFEX	SIZE: A4	规格 TYPE:

深圳市永连旺电子有限公司