

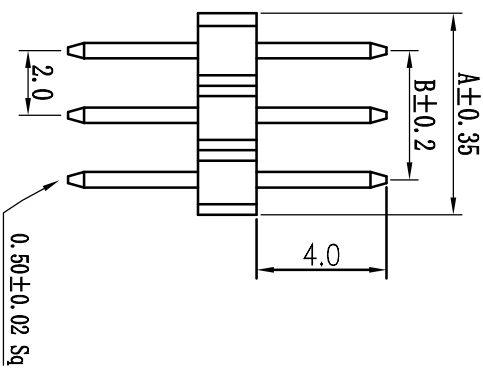


版本	变更内容	变更人	日期
A			

SPECIFICATIONS


Current Rating: 3Amps
 Insulator resistance: 5000 Megohms min.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°~+105° C
 Contact Material: Brass
 Insulator Material: PA6T
 Plating: Glod flash

UNSPECIFIED TOLERANCE: ±0.20




Dimensions list

Contacts Per row	Dimensions		Contacts Per row	Dimensions	
	A	B		A	B
1	2.0	0	21	42.0	40.0
2	4.0	2.0	22	44.0	42.0
3	6.0	4.0	23	46.0	44.0
4	8.0	6.0	24	48.0	46.0
5	10.0	8.0	25	50.0	48.0
6	12.0	10.0	26	52.0	50.0
7	14.0	12.0	27	54.0	52.0
8	16.0	14.0	28	56.0	54.0
9	18.0	16.0	29	58.0	56.0
10	20.0	18.0	30	60.0	58.0
11	22.0	20.0	31	62.0	60.0
12	24.0	22.0	32	64.0	62.0
13	26.0	24.0	33	66.0	64.0
14	28.0	26.0	34	68.0	66.0
15	30.0	28.0	35	70.0	68.0
16	32.0	30.0	36	72.0	70.0
17	34.0	32.0	37	74.0	72.0
18	36.0	34.0	38	76.0	74.0
19	38.0	36.0	39	78.0	76.0
20	40.0	38.0	40	80.0	78.0



PCB Layout

X	±0.5	X.°	±1.0°
.X	±0.15	.X°	±0.5°
.XX	±0.05	.XX°	±0.2°
.XXX	±0.02	.XXX°	±0.1°



客户: _____ 产品名称: PH2.0*2.0 1*XP脚贴片针

单位: MM 产品料号: _____

材质: 6T 图号: _____

数量: _____ 比例: 1:1 批次: A

设计: 向艳 日期: 13-12-26

审核: _____ 日期: _____

批准: _____ 日期: _____

深圳市永连旺电子有限公司