
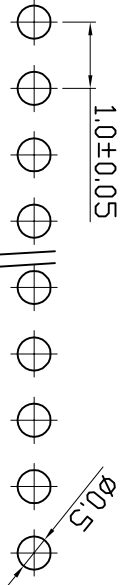
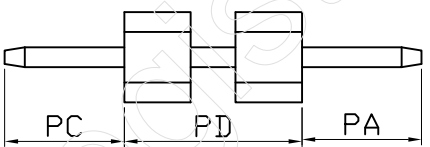
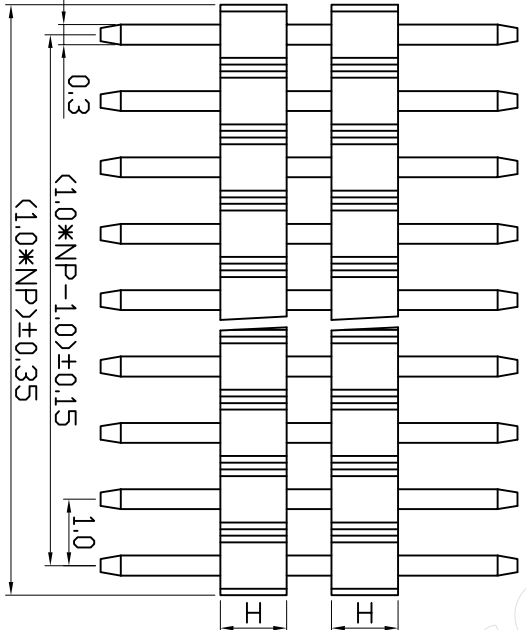


版本 REV	编号 ECON NO.	位置 LOCATIONS	变更内容 DESCR IPTION	日期 DATE	变更人 DESIGN
A0					



PCB LAYOUT

Specifications

1. Current Ratings: 1amps
2. Insulation Resistance: 1000 M $\Omega$  min.
3. Dielectric withstanding Voltage: AC 500V
4. Contact Resistance: 30 m $\Omega$  max.
5. Operating Temperature: -25 $^{\circ}$ C to +85 $^{\circ}$ C
6. Contact Material: Brass
7. Insulation Material: Asfollows
8. Plated: Asfollows

TOLERANCE UNLESS OTHERWISE SPECIFIED	
LINER	ANGLES
0.0 $\pm$ 0.3	0.0 $^{\circ}$ $\pm$ 2.0 $^{\circ}$
.00 $\pm$ 0.2	.0 $^{\circ}$ $\pm$ 1.0 $^{\circ}$
.000 $\pm$ 0.1	.00 $^{\circ}$ $\pm$ 0.5 $^{\circ}$

<b>深圳市永连旺电子有限公司</b>	
品名 TITLE:	PHI. 0#1 180 $^{\circ}$ 单排双翘排针
料号 (P/N):	
文件编号 (D/N):	
比例 (SCALE):	1:1
单位 (UNIT):	mm
审核 (CHKD):	
核准 (APPD):	
日期 (Date):	
日期 (Date):	
日期 (Date):	
张数 (SHEET):	XOFX
比例 SIZE:	A4
类别 TYPE:	