


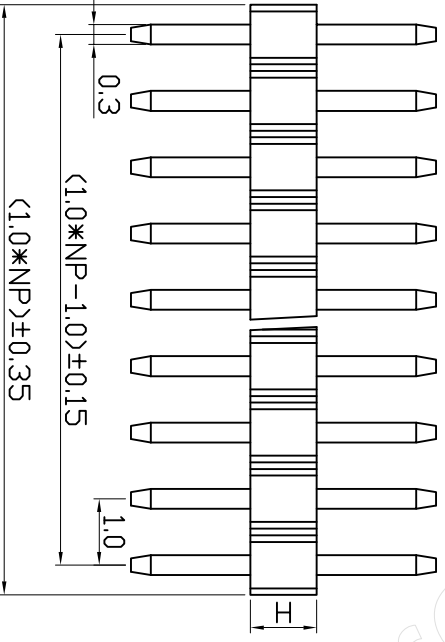


版本 REV	编号 ECN NO.	位置 LOCATIONS	变更内容 DESCRIPTION	日期 DATE	变更人 DESIGN
A					



PCB LAYOUT

Specifications

1. Current Ratings: 1Amps
2. Insulation Resistance: 1000 MΩ min.
3. Dielectric withstanding Voltage: AC 500V
4. Contact Resistance: 30 mΩ max.
5. Operating Temperature: -25°C to +85°C
6. Contact Material: Brass
7. Insulation Material: As follows
8. Plated: As follows

深圳市永连旺电子有限公司

品名 TITLE:	PHI.041 NP 180° 单排排针	料号 (P/N):	规格 (DIM):	日期 (Date):	09.08.19
OTHERWISE SPECIFIED		文件编号 (D/N):	核准 (CHECK):	日期 (Date):	
TOLERANCE UNLESS OTHERWISE SPECIFIED		角度 (ANGLE):	核准 (APPD):	日期 (Date):	
LINER		±0.3	±2.0°		
		0°	±1.0°		
		±0.2	±0.5°		
		±0.1			
比例 (SCALE):	1:1	单位 (UNIT):	mm	张数 (SHEET):	XOFX
				SIZE:	A4
				级别 (TYPE):	