
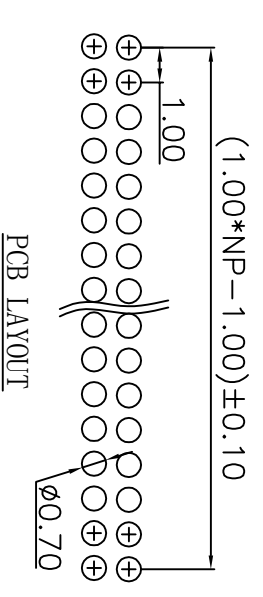

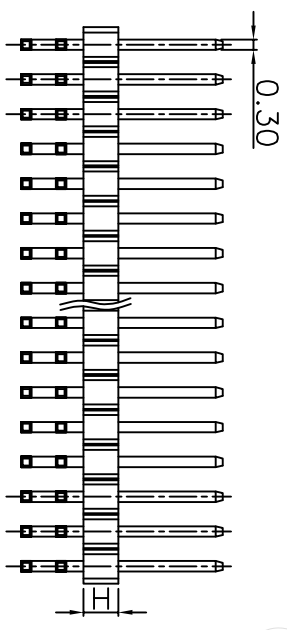


|     |      |          |         |
|-----|------|----------|---------|
| 版本号 | 变更说明 | 日期       | 签名      |
| A   | NEW  | 12.07.09 | Zeng_qc |

Specifications

1. Current Ratings: 1Amps
2. Insulation Resistance: 5000 MΩ min.
3. Dielectric withstanding Voltage: AC 500V
4. Contact Resistance: 30 mΩ max.
5. Operating Temperature: -40°C to +105°C
6. Contact Material: Copper Clad Steel
7. Insulation Material: As follows
8. Plated: As follows

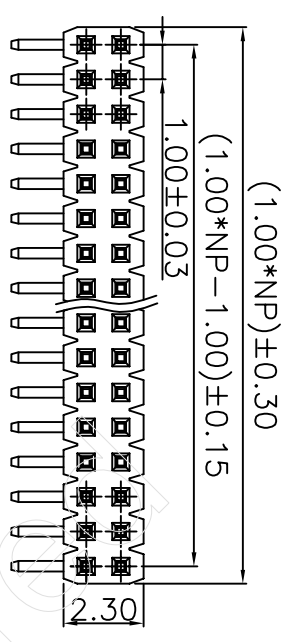

深圳市永连旺电子有限公司

| 公差尺寸 | 公差标准       | 角度           | 度             |
|------|------------|--------------|---------------|
| 0    | $\pm 0.25$ | $0^\circ$    | $\pm 3^\circ$ |
| .00  | $\pm 0.20$ | $0^\circ$    | $\pm 2^\circ$ |
| .000 | $\pm 0.10$ | $0.00^\circ$ | $\pm 1^\circ$ |

|                        |     |    |    |    |    |     |    |
|------------------------|-----|----|----|----|----|-----|----|
| 品名                     |     | 材料 |    | 制图 |    | 审核  |    |
| 挂针PHL.00 双排 2XNP 90度系列 |     |    |    |    |    |     |    |
| 文件编号                   | 比例  | 单位 | mm | 核  | 页码 | 1/2 | 尺码 |
|                        | 1:1 |    |    |    |    |     | A4 |